


LCDOT PARKING LOT IMPROVEMENTS

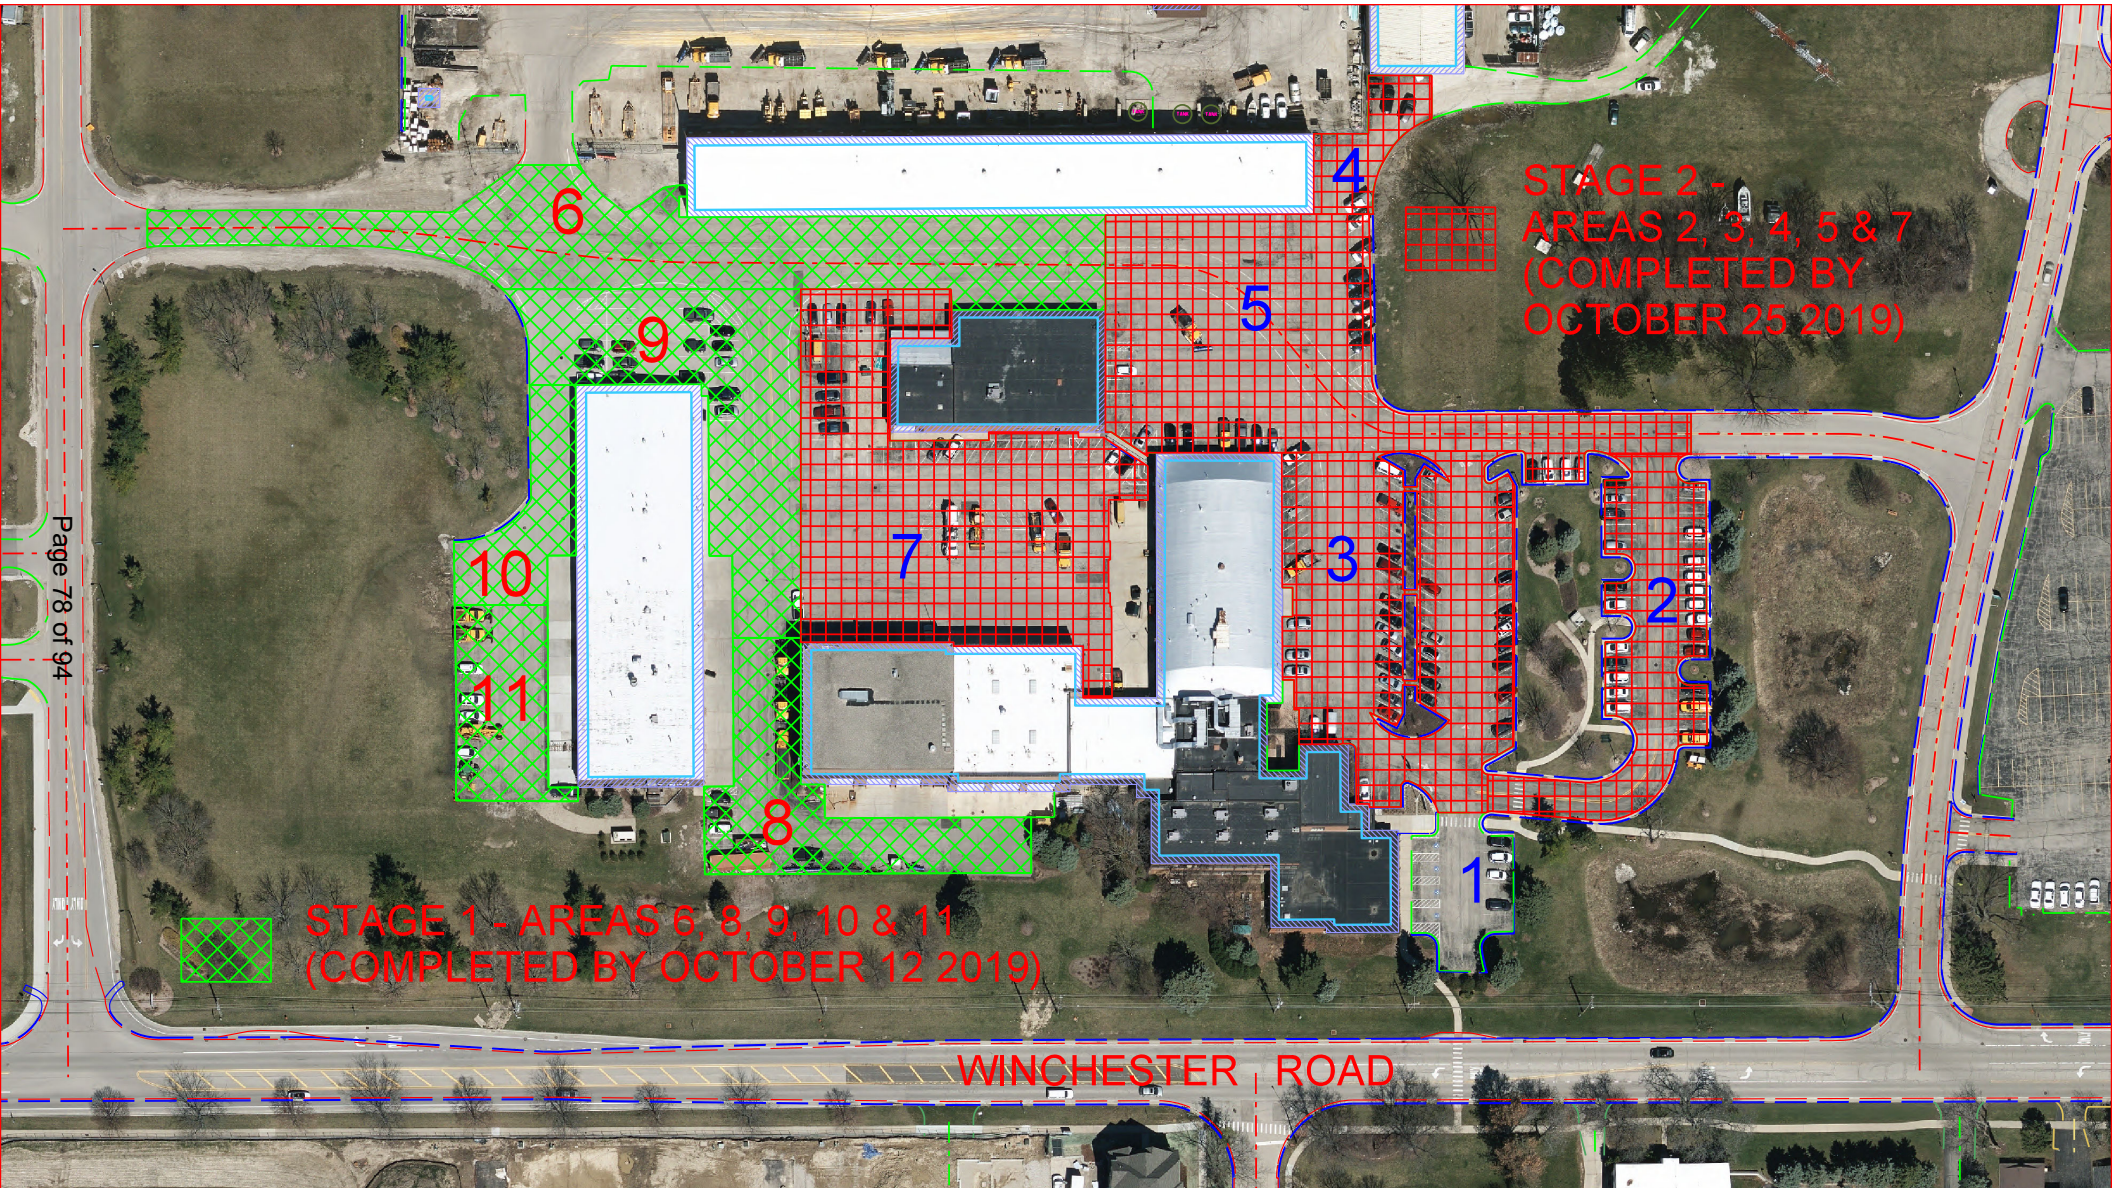

DESCRIPTION OF IMPROVEMENT

The work at the LCDOT facility is broken into ten areas (areas 2-11). The improvements include the following strategies:

- Strategy I (areas 2, 7 & 11)
 - Pavement removal (4" depth assumed)
 - Undercut
 - Aggregate Base Repair
 - 2½" Binder Course
 - 1½" Surface Course
- Strategy II (areas 3, 8, 9 & 10)
 - Mill 2¼"
 - Class D Patching
 - ¾" Leveling Binder
 - 1½" Surface Course
- Strategy III (areas 4, 5 & 6)
 - Mill 3¾"
 - Class D Patching
 - 2½" Binder Course
 - 1½" Surface Course

The LCDOT parking lot improvements also include the removal and replacement of concrete curb and gutter; drainage structure adjustments; & traffic control and protection.